



Vulsol MSF 7200

Synthetic cutting fluid for machining and grinding a wide range of metals.

DESCRIPTION

- **Vulsol MSF 7200** is recommended for machining and grinding steel and its alloys as well as non-ferrous metals.
- **Vulsol MSF 7200** is also designed for machining plastic materials as well as for machining and polishing special optical lenses.

ADVANTAGES

- **Vulsol MSF 7200** is very easy to use
- Excellent cooling and lubricant power.
- Efficient protection of machined parts and machines against corrosion.
- Good mechanical performances, providing:
 - Reduced cutting efforts
 - Extended tool lifetime
 - Very good surface finish to parts.
- Properties in service:
 - Excellent stability over time increases drain intervals;
 - Cuttings have low rate of humidity;
 - Good anti-foaming properties.
- Resist to the development of bacteria and fungus, so is environmentally and operator friendly.
- Multifunctional.
- Very good separation of tramp oils and settling of sludges.
- Very good detergency

This lubricant used as recommended and for the application for which it has been designed does not present any particular risk. A material safety data sheet conforming to the regulations in use in the E.C. can be obtained from your local commercial advisor or downloaded at ms-sds.totalenergies.com


TYPICAL CHARACTERISTICS

Typical characteristics	Methods	Units	Vulsol MSF 7200	
			Concentrate	Solution at 5 %
Density at 15 °C	ISO 3675	kg/m ³	1122	
Kinematic viscosity at 40 °C	ISO 3104	mm ² /s	83	
pH	NF T 60 193			9.2
Refractometric factor				1.0

The characteristics shown in this table are typical values given for illustrative purposes.

CONCENTRATION RECOMMENDATION

Application	Minimum	Maximum
Grinding	3 v%	4 v%
Machining	4 v%	7 v%

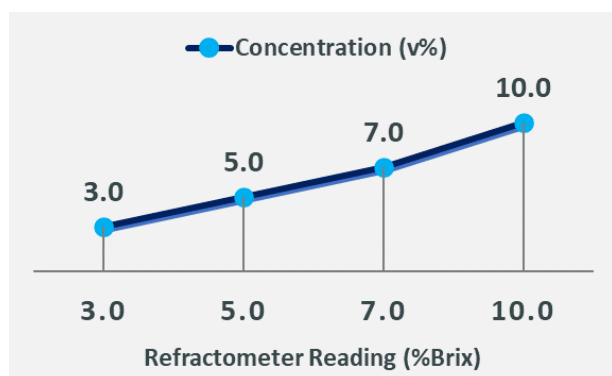

STORAGE AND HANDLING

- To ensure good conservation of the fluid's properties through time and thus increase its lifetime, we recommend:
 - Regular monitoring of the concentration of the bath with a refractometer. Do not forget to multiply the reading value by the refractometric factor.
 - Regular monitoring of the pH of the emulsion and the hardness of the water.
- TotalEnergies offers its clients a regular laboratory fluid analysis service: *ANAC Soluble*. Get in touch with your sales contact to obtain further information.
- Your sales and technical contacts are ready to provide you further information.

This lubricant used as recommended and for the application for which it has been designed does not present any particular risk. A material safety data sheet conforming to the regulations in use in the E.C. can be obtained from your local commercial advisor or downloaded at ms-sds.totalenergies.com